

Common Mode Choke Coil

Fixed Inductor for Surface Mounting

SCF4532-26NA Series

Construction

- Ferrite Material

Features


- Operating temperature -40 ~ +150°C
(Including self - temperature rise)
- Qualified to AEC-Q200
- 100% Lead(Pb)& Halogen-Free and RoHS compliant
- High common mode impedance at high frequency effects excellent noise suppression performance.
- realizes small size and low profile 4.5*3.2*2.6 mm.




Applications

- Power switch and servers
- USB communication
- Telecommunication applications
- Panel link for LCD panels
- Countering common mode noise affecting signals in high-speed lines

Dimensions(Unit:mm)

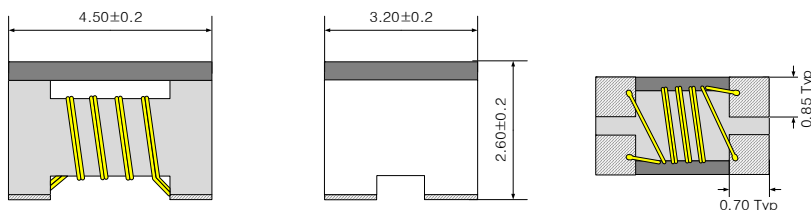

Recommended Land Pattern(Unit:mm)



Electrical Characteristics

Ordering code	Inductance (uH,100kHz,0.1V)	DCR (mΩ,MAX)	Impedance (Ω,MIN,10MHz)	IR (MΩ,MIN)	Rated Voltage (V,MAX,Vdc)	Irms (mA,MAX)
SCF4532-110P-26NA	11.0+50%/-30%	600.0	300.0	10.0	50.0	250.0
SCF4532-220P-26NA	22.0+50%/-30%	1,000	500.0	10.0	50.0	200.0
SCF4532-510P-26NA	51.0+50%/-30%	1,000	1,000	10.0	50.0	200.0
SCF4532-101P-26NA	100.0+50%/-30%	2,000	2,000	10.0	50.0	150.0

*Notes

*Irms : DC current (A) that will cause an approximately ΔT of 40 °C

*Specifications subject to change without notice. Please check our website for latest information.

Revised 04/02/26